


STANDARD TYPE 'A' CURB

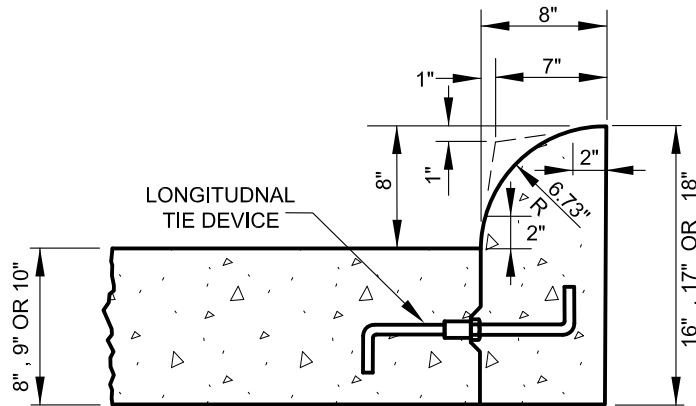

STANDARD TYPE 'A' MODIFIED CURB

NOTES

1. JOINT SPACING FOR CONCRETE CURBS = 10 FEET
2. SEE SPECIFICATIONS FOR LOCATION AND DESCRIPTION OF TREATMENT FOR THE TYPES OF JOINTS SPECIFIED
3. ALL CONCRETE CURBS SHALL BE TIED TO RIGID PAVEMENT USING A LONGITUDINAL TIE DEVICE, SEE BC 572.61-1



APPROVED:
Primal Dev...
 DIVISION CHIEF, TRANSPORTATION ENGINEERING AND CONSTRUCTION
Khalil Z...
 DIRECTOR, DEPARTMENT OF TRANSPORTATION

CITY OF BALTIMORE
 DEPARTMENT OF TRANSPORTATION
 TRANSPORTATION ENGINEERING AND
 CONSTRUCTION

STANDARD TYPE 'A' CURB
STANDARD
TYPE 'A' MODIFIED CURB

ISSUED	REVISED	REVISED
8 / 2010		
STANDARD NO. BC 620.01		
SCALE : NONE	SHEET 1 OF 1	