



PLAN

* H = HEIGHT OF CURB
ALL MEASUREMENTS IN INCHES

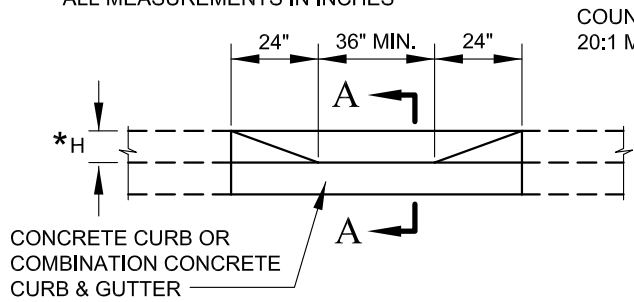

ELEVATION

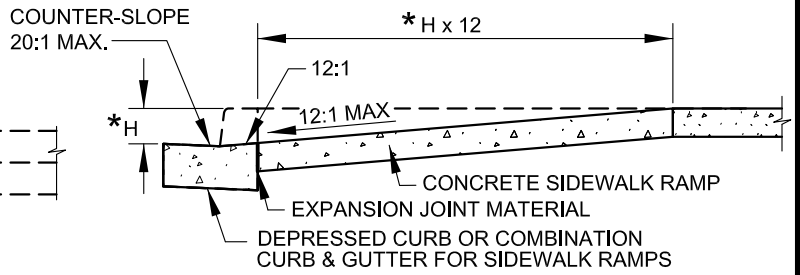

SECTION A-A

NOTES

1. TO BE USED WHERE A PEDESTRIAN ACCESS ROUTE CROSSES RAISED MEDIANS OR RAISED ISLANDS AND THERE IS SUFFICIENT WIDTH TO SATISFY THE GEOMETRY OUTLINED IN THIS STANDARD.
2. EXPANSION JOINT MATERIAL SHALL BE INSTALLED IN ACCORDANCE WITH STANDARD BC 655.01.
3. RAMPED MEDIAN AND ISLAND OPENINGS SHALL BE MEASURED AND PAID AT THE CONTRACT UNIT PRICE PER SQUARE FOOT FOR CONCRETE SIDEWALK. DETECTABLE WARNING SURFACE SHALL BE PAID FOR ON A SQUARE FOOT BASIS.
4. RAMPED MEDIAN AND ISLAND OPENINGS TO BE SHOWN ON PLANS SYMBOLICALLY AND REFERENCED WITH THE CENTER OF THE OPENING ALIGNED TO A STATION ON THE CONSTRUCTION CENTERLINE. SEPARATE DETAILS SHALL BE SHOWN WHERE PROPOSED OPENING VARIES FROM STANDARD METHODS.



APPROVED:
Primal Dev...
DIVISION CHIEF, TRANSPORTATION ENGINEERING AND CONSTRUCTION
Khalil Z...
DIRECTOR, DEPARTMENT OF TRANSPORTATION

CITY OF BALTIMORE
DEPARTMENT OF TRANSPORTATION
TRANSPORTATION ENGINEERING AND CONSTRUCTION

RAMPED
MEDIAN AND ISLAND OPENINGS

ISSUED	REVISED	REVISED
8 / 2010		
STANDARD NO. BC 655.22		
SCALE : NONE	SHEET 1 OF 1	